
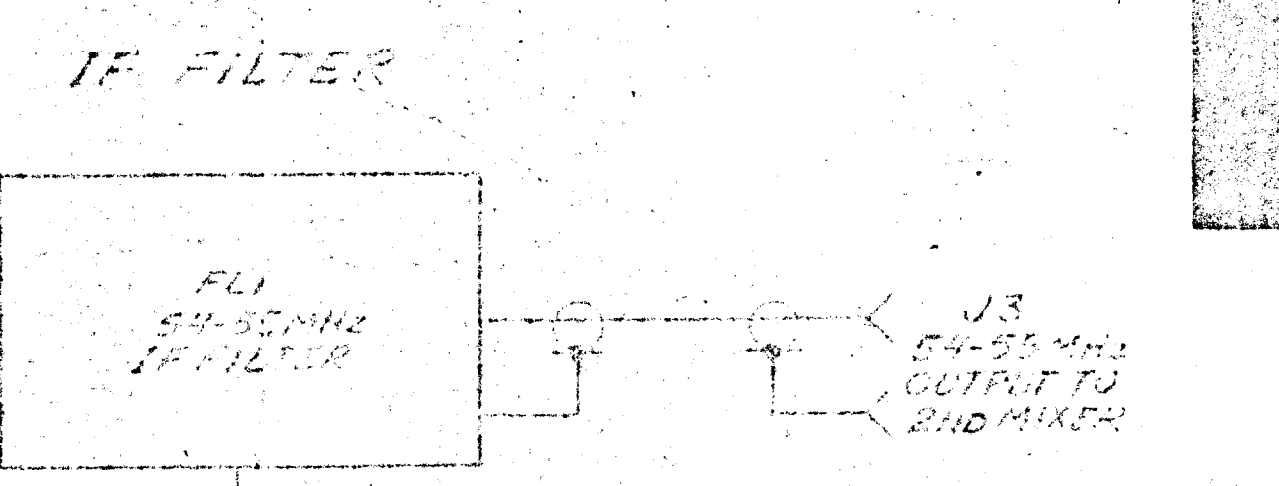


100 OHM TO 150 OHM
OUTPUT TO
SECOND MIXER.

- NOTES:
1. DC VALUE MEASURED WITH 100 OHM INPUT IMPEDANCE
 2. AC VALUE MEASURED WITH HIGH INPUT IMPEDANCE (FETVM, OSCILLOSCOPE OR SIMILAR)
 3. ALL VALUES ARE APPROXIMATE
 4. VALUES WITH 002 VOLTS
 5. UNLESS OTHERWISE SPECIFIED ALL RESISTORS ARE IN OHMS, 1% TOL. ALL CAPACITORS ARE IN MICROFARADS
 6. THE FOLLOWING PREFERRED DESIGNATIONS ARE NOT USED:
R1, R2, C3, C2, C10, C4, AND B2

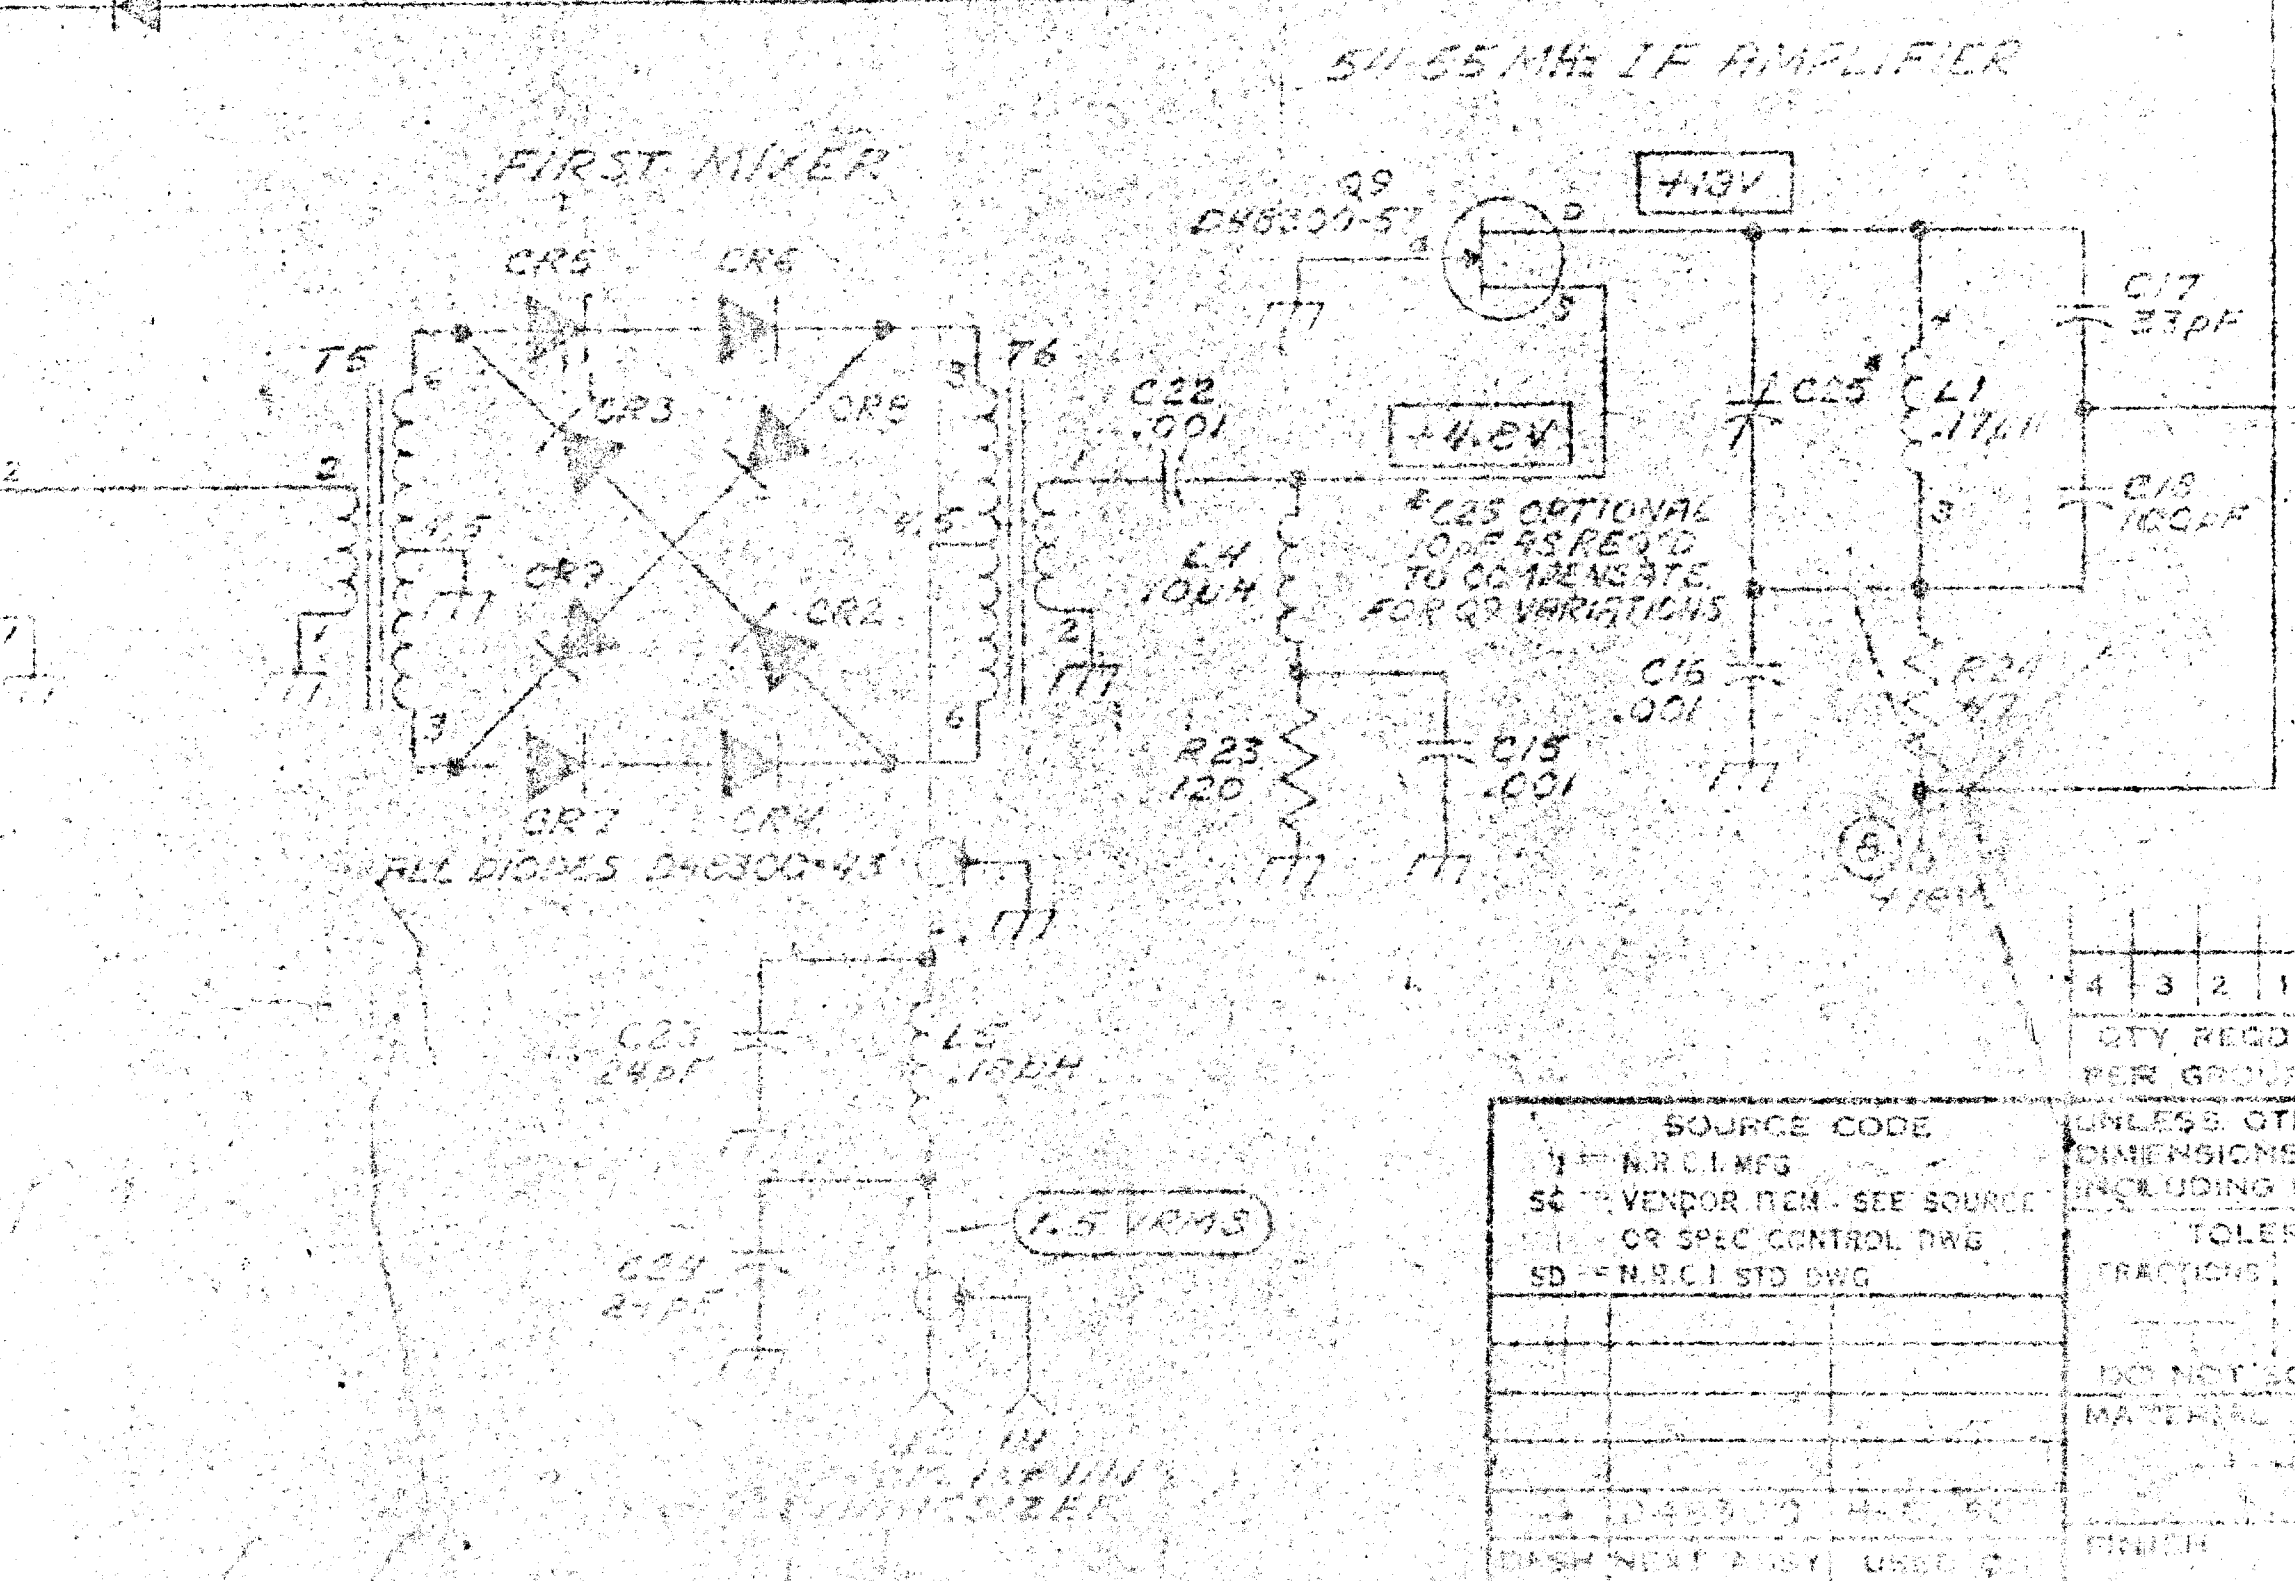

4	3	2	1	QTY REQD. PER GROUP	SIZE	PART NUMBER	DESCRIPTION	PREFERENCE DESIGNATOR	SPECIFICATION OR NOTES	TEMP. RANGE
1	1	1	1	1						
SOURCE CODE 11 - N.R.C. I.M.F. 50 - VENDOR ITEM - SEE SOURCE 10 - OR SPEC CONTROL DWG SD - N.R.C. STD DWG							CONTRACT NO.		NATIONAL RADIO COMPANY, INC. MELROSE, MASSACHUSETTS	
UNLESS OTHERWISE STATED, DIMENSIONS ARE IN INCHES INCLUDING PLATING IF REQUIRED							DRAWN BY: [Signature]		DRAWING TITLE	
TOLERANCES ON FRACTIONS, DECIMALS, ANGLES							DATE: [Date]		SCHEMATIC DIAGRAM (FRONT VIEW) A2	
DO NOT SCALE THIS DRAWING							CHECKED BY: [Signature]		SIZE: CODE IDENT. NO. DRAWING NUMBER	
DASHED DIMENSION LINES ARE USED FOR HIDDEN DIMENSIONS							APPROVED - H.P.C.		D 42495 D49	
FINISH							APPROVED - DESIGNER			